


ProSafe lashing belt ratchet 3.5 m

Material no.: 1000000225 | Matchcode: PSH RA 3,5 | EAN code: 4045294195922

- » resilient up to 400 daN
- » strap width of 25 mm
- » quicker access to freight
- » universally applicable in vehicles
- » enables flexible load securing

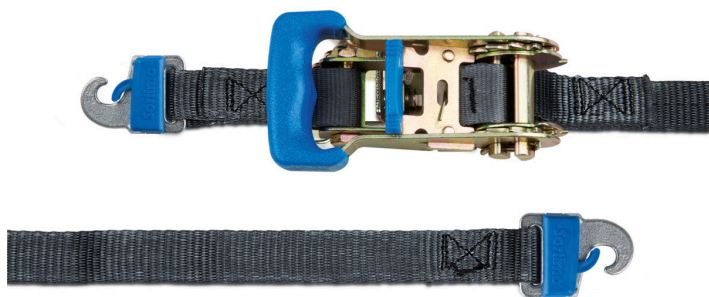

Materials & Color

Material:	PA6 Polyester Steel
Color:	Anthracite

Dimensions

External dimensions:	138.8 x 2.5 x 1.4 in
Length in inch:	3500








Technical data

Weight:	1.39 lb
Maximum tensile force in daN:	400

ProSafe lashing belt ratchet 3.5 m

Material no.: 1000000225 | Matchcode: PSH RA 3,5 | EAN code: 4045294195922

Accessories

	Material no.	Description	Matchcode	EAN code
	1000001736	ProSafe individual lashing point restraint pole	EZ S PS	4045294228040
	1000001870	Flexible edge protection lash. straps(4x)	ZFKS ZG VPE4	4045294230999
	1000003736	ProSafe CargoStopp	CST PS	4045294403072
	6000001231	ProSafe individual lashing point	EZ PS	4045294224646
	6000001259	ProSafe floor lashing point	BZ PS S	4045294225179
	6000001260	ProSafe floor lashing point restraint pole	BZ SP PS	4045294225186
	6000001116	Anti-rattle mat 750x500	ARM 750X500	4045294239565

ProSafe lashing belt ratchet 3.5 m

Material no.: 1000000225 | Matchcode: PSH RA 3,5 | EAN code: 4045294195922

Description

The ProSafe lashing belt with a ratchet and a length of 3.5 m can be universally used in the vehicle and in connection with the Sortimo TopSystem on the vehicle roof. The ratchet enables a higher clamping force to be achieved as would be possible with the clamp buckle. This means you can secure particularly heavy objects professionally and quickly. The lashing belts are compatible with ProSafe uprights from Sortimo's Globelyst van racking system and Sortimo HD, ProSafe rails, Sobo Grip ProSafe floor, individual lashing points, restraint poles with individual lashing point as well as with the original lashing points from the vehicle manufacturer. The lashing belt has a resilience of up to 400 daN and the belt width is 25 mm. The anti-slip mat which can be cut to size (Ref. No.: 6000003365) additionally prevents the shifting of payloads. An edge protection profile should be used to protect the lashing strap and the load.

We reserve the right to make changes in the interest of technical progress, as well as correcting printing errors and mistakes. Pictures are similar, decorative material not included. With the publication of this data sheet, previous editions lose their validity. Version: 29.02.2024