


## ProSafe lashing belt clamp buckle 1.4 m, 250 daN

Material no.: 1000000224 | Matchcode: PSH KS 1,4 | EAN code: 4045294195915

- » Load capacity of up to 250 daN
- » Strap width of 25 mm
- » Quick access to freight
- » Universal use in vehicles
- » Provides for flexible load securing

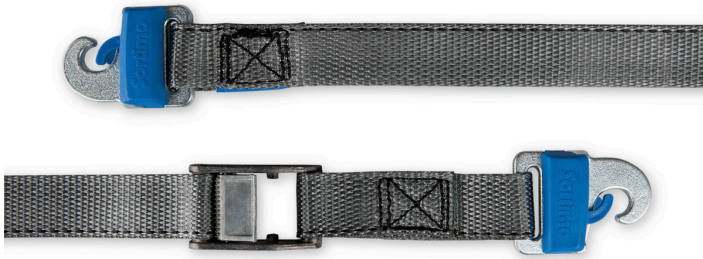

### Materials & Color

Material:	PA6 Polyester Steel
Color:	Anthracite

### Dimensions

External dimensions:	57.4 x 1.5 x 0.7 in
Length in inch:	1400








### Technical data

Weight:	0.44 lb
Maximum tensile force in daN:	250

## ProSafe lashing belt clamp buckle 1.4 m, 250 daN

Material no.: 100000224 | Matchcode: PSH KS 1,4 | EAN code: 4045294195915

### Accessories

	Material no.	Description	Matchcode	EAN code
	1000001736	ProSafe individual lashing point restraint pole	EZ S PS	4045294228040
	1000001870	Flexible edge protection lash.straps(4x)	ZFKS ZG VPE4	4045294230999
	1000003736	ProSafe CargoStopp	CST PS	4045294403072
	6000001231	ProSafe individual lashing point	EZ PS	4045294224646
	6000001259	ProSafe floor lashing point	BZ PS S	4045294225179
	6000001260	ProSafe floor lashing point restraint pole	BZ SP PS	4045294225186
	6000001116	Anti-rattle mat 750x500	ARM 750X500	4045294239565

## ProSafe lashing belt clamp buckle 1.4 m, 250 daN

Material no.: 1000000224 | Matchcode: PSH KS 1,4 | EAN code: 4045294195915

### Description

The ProSafe lashing belt with clamp buckle and with a length of 1.4 m can be universally deployed in the vehicle to secure lightweight goods and be intuitively operated with one hand. It is compatible with the integrated ProSafe from Sortimo's SR5 and Globelyst4 van racking systems, ProSafe lashing rails, SoboGrip ProSafe floor, individual lashing points, as well as with the vehicle manufacturer's original lashing points. The lashing belt has a load capacity of up to 250 daN and a width of 25 mm. The anti-rattle mat that can be cut to size (ref. no.: 6000003365) also prevents the load from sliding. An edge protection profile should be used to protect the lashing belts and the load.

We reserve the right to make changes in the interest of technical progress, as well as correcting printing errors and mistakes. Pictures are similar, decorative material not included. With the publication of this data sheet, previous editions lose their validity. Version: 07.02.2025